



Index		Änderungen				Datum		Name	
DEHOUST		ISO Methode E 		Schutzvermerk nach DIN ISO 16016 beachten Allgemeintoleranzen nach DIN 28005-1		Werkstoff		Maßstab 1 : 75	
		Grauwasseranlage DEHOUST GWtec® 440 B				Behälter-Nr.:		Gewicht 0,0 kg	
Bearb. 05.07.2023		Name sk		Zeichnungs-Nr.:		Blattgröße:		Blatt-Nr.: 1	
Gep.				Artikel-Nr.:		A4		Blattzahl: 3	
Norm.				D627640				813374	

Installation of the aerator pumps have to be above the max. water level inside the greywater tank.

coarse filter DEHOUST MAX II
inlet/overflow/outlet: DN150

greywater collection tank 4.000 DF
inflow/overflow:DN 100

Greywater filtration tank:
3.000 DF and aeration unit
overflow port: DN 100

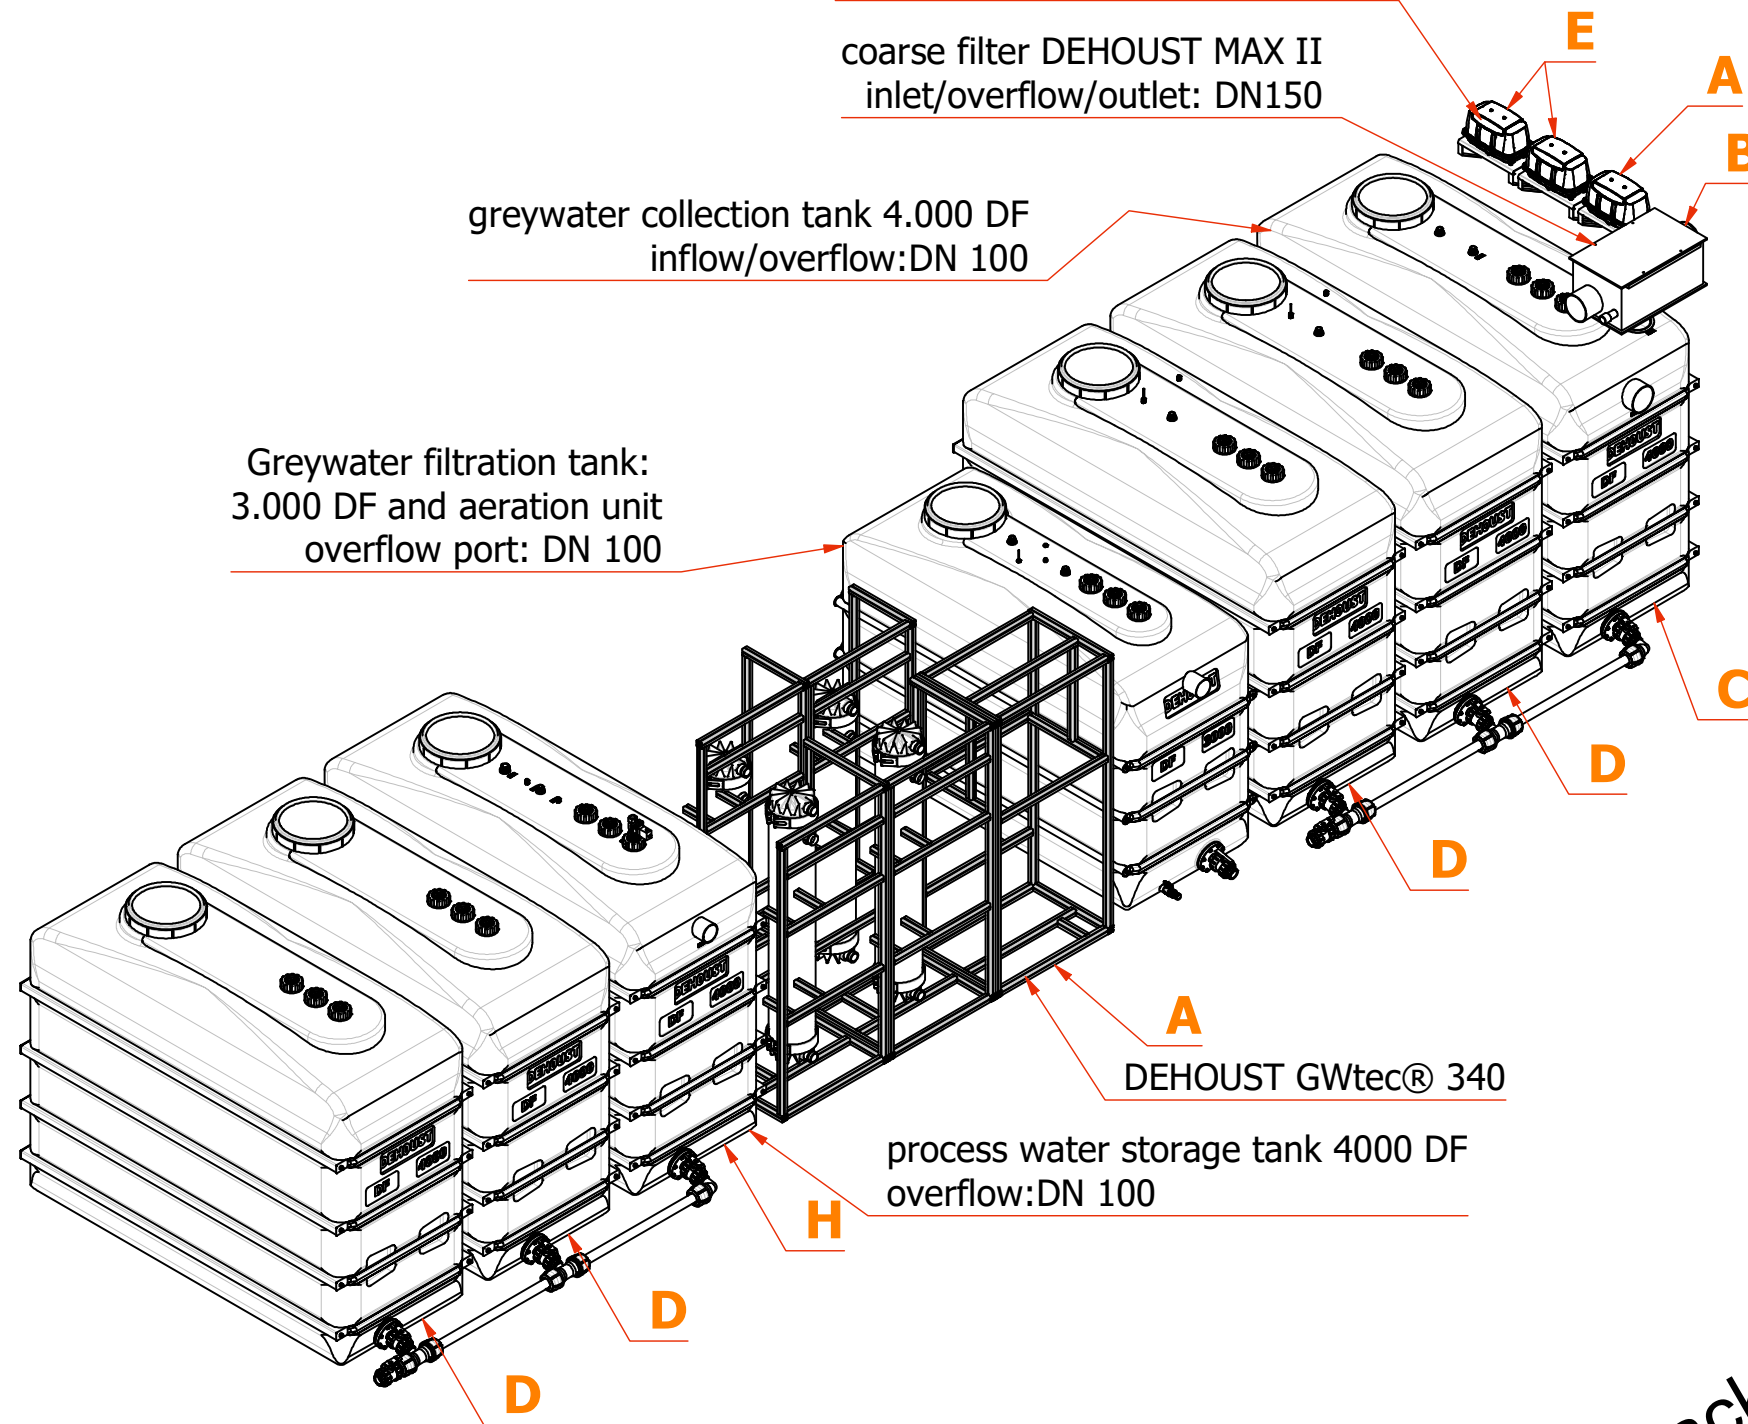

DEHOUST GWtec® 340

process water storage tank 4000 DF
overflow:DN 100

(A)
Type: DEHOUST GWtec® 440
Item: 813373
Max. treatment capacity: 15.000 litres/day
PVC flex hose:filtrate effluent 1" female thread, black, length 5m
weight: 260 kg

Greywater filtration tank: 1x PE HD 3.000 DF incl. aeration unit
overflow port: DN 100
drain valve:1 1/2" female thread
PVC flex hose:suction line 1" PVC flex hose blue, length 3 m
Empty weight: 120 kg

(B)
Type: coarse filter DEHOUST MAX II
Item: 812657
inlet/overflow/outlet: DN150
Connection backwash: 1" female; pmin: 1 bar; pmax: 2 bar
empty weight:15 kg

(C)
Type: greywater collection tank 4.000 litres
Item: 962059
inflow/overflow:DN 150
Drain valve:1 1/2" female thread
Empty weight: 235 kg

(D)
Type:Extension tank 4.000 L for a GW collection tank
or BW storage tank
item:962039
empty weight:235 kg

(E)
Type:Aeration unit for further PE HD greywater
collection tank
item:813440
PVC flex hose:3/4" female thread,red length 5m

(F)
Type: extension package aeration unit
Item: 813442
PVC flex hose:3/4" female thread,red length 5m

(G)
Type: greywater batch pump DOC 7
Item: 813444
PVC flex hose:1" female thread, black, length 5m

(H)
Type: process water storage tank 4.000 liters
Item: 962058
overflow:DN 100
Connection mains water back up: 1" female ; pmin: 1 bar; pmax: 10 bar
Emergency overflow DIN EN 1717:LxW 2 x 200 x 125 mm
Drain valve:1 1/2" female thread
Empty weight: 235 kg

Overall technical specification
Total weight:1.400 kg
electrical load:400 V / 16 A / 50 Hz / 3,35 kW

Backside

Pipes not included in delivery:

In- and overflow pipe DN 150
Pressure line backwash pump DN 32 (1 1/4") from tank H to DEHOUST GWtec® A
Pressure line booster pump DN 25 (1") from DEHOUST GWtec® to coarse filter DEHOUST II B

Installation of air compressor have to be above the max. water level inside the greywater tank.




Dimensions in mm; distance to wall min. 300 mm.


*Height depends on the installation material

Technical change reserved. This installation example is subject to change.

All transactions are subject to our general terms and conditions.

Index		Änderungen		Datum	Name
DEHOUST		ISO Methode E	ISO 16016 beachten	Werkstoff	Maßstab
		Schutzvermerk nach DIN ISO 16016 beachten Allgemeintoleranzen nach DIN 28005-1			1 : 40
		Grauwasseranlage		Behälter-Nr.:	Gewicht
		DEHOUST GWtec® 440 B			0,0 kg
Bearb.	Datum	Name	Zeichnungs-Nr.:	Blattgröße:	Blatt-Nr.:
	05.07.2023	sk	D627640	A3	2
Gep.			Artikel-Nr.:	Blattzahl:	3
Norm.			813374		

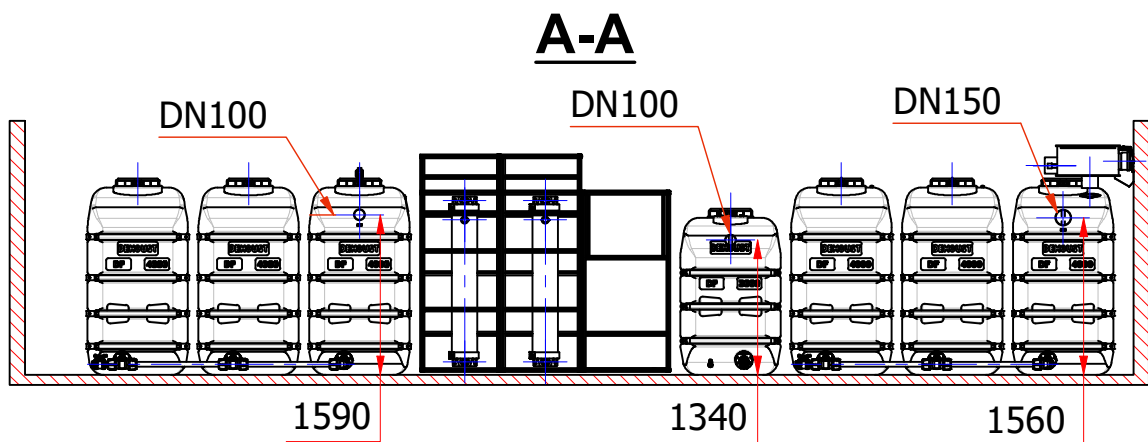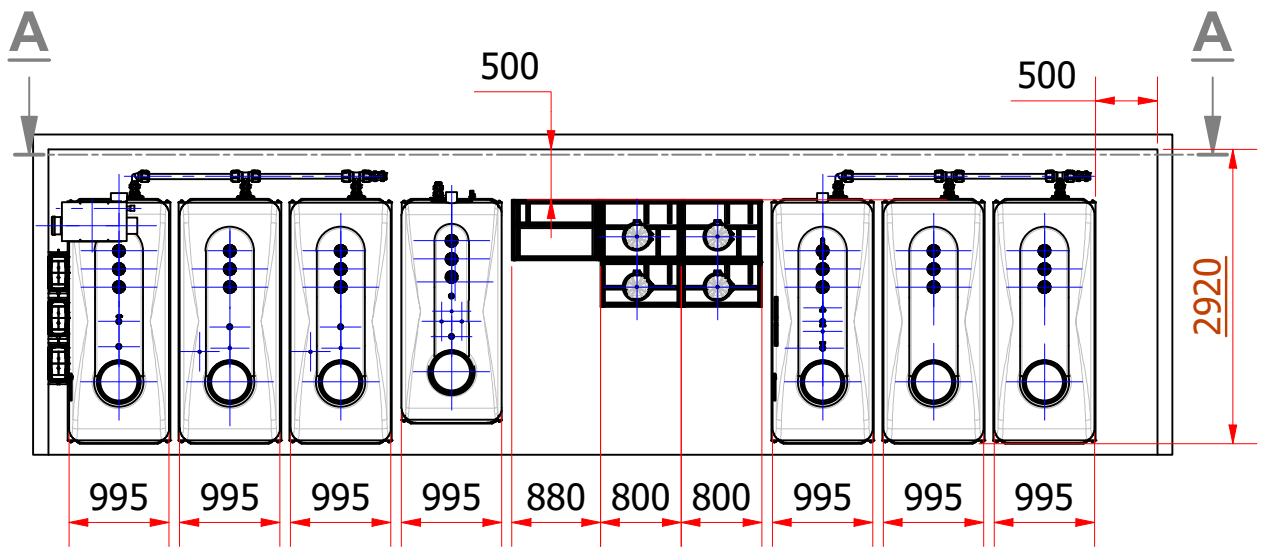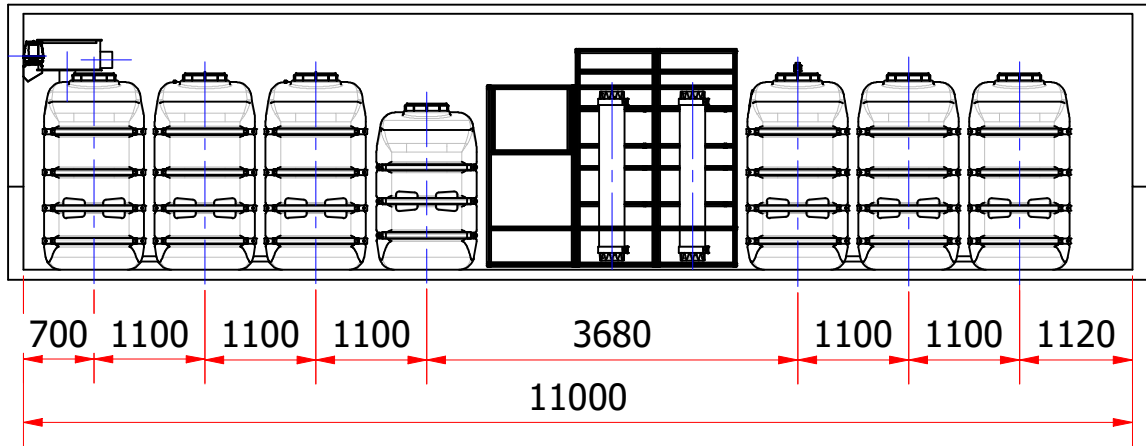

Index		Änderungen		Datum	Name
DEHOUST		ISO Methode E	 Schutzvermerk nach DIN ISO 16016 beachten Allgmeintoleranzen nach DIN 28005-1	Werkstoff	Maßstab 1 : 75
Bearb.	Datum	Name	Grauwasseranlage DEHOUST GWtec® 440 B	Behälter-Nr.:	Gewicht 0,0 kg
Gep.	05.07.2023	sk		Zeichnungs-Nr.:	Blattgröße:
Norm.			D627640	Artikel-Nr.:	Blattzahl: 3
				813374	
				A4	