

Description

The double-walled storage and disposal tanks of the TrioSafe series (inner tank and secondary containment made of HD-PE) are the perfect solution for the safe storage of heating oil, diesel fuel and other liquids. Inner tanks comply with EN 13341.

To accommodate the extensive accessories, all tanks are equipped with 4 upper 2" connections.

The tanks are designed to withstand a fire of 30 minutes without becoming leaky.



Set-Up

The tank can be installed in buildings without extra dyke. It is set up as a single tank. The distance to the walls or other components should be at least 5 cm. The base of the tanks must stand completely on a flat, horizontal, rigid and smooth support plate (floor).

The state regulations must be observed.

Approved media

- Heating oil or heating EL A Bio 15
- Diesel fuel in acc. with DIN EN 590 or Bio-diesel in acc. with DIN EN 14214
- Lubricants, hydraulic oils, heat transfers oils
- Vegetable oil such as cotton seed, olive, rapeseed, castor oil or wheat germ oil in any concentration
- Used oils of known origin with a flashpoint of over 55 °C.
- AdBlue
- Concrete additives
- Radiator antifreeze

Daily service tank and feeder tank for emergency power systems

More connectivity for measuring instrumentation and control equipment with duplex bushings (Item no. 920110).

Tanks for lubricating oil for CHP and biomass power plants, emergency power systems and other machinery have higher requirements on measuring and control equipment.

With the duplex bushings we enable the use of our tanks PE Kombi and TrioSafe as day tanks and feeder tanks.




The field of applications are multiple.

The tanks are used in utilities management, petrol stations, garages, agriculture and industrial plants.




Dimensions and weight

TrioSafe 750 / 1000

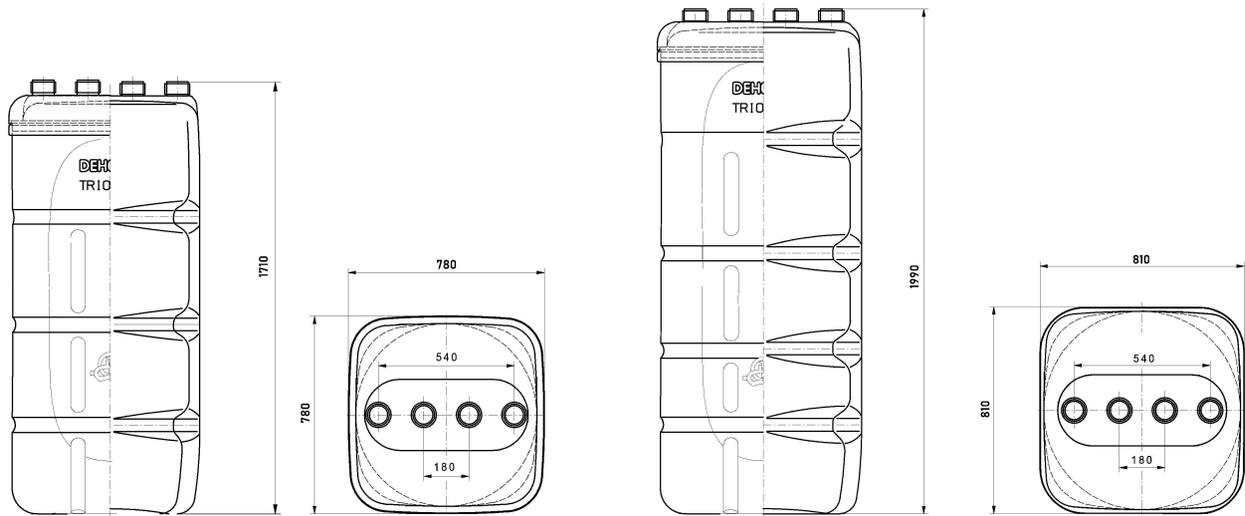

Item no.	Typ / content	Dimensions mm (LxBxH)	Weight
961503	TrioSafe 750 VS	780 x 780 x 1.710	44 kg
961504	TrioSafe 750 VS (Grey)		
961511	TrioSafe 1000 VS	810 x 810 x 1.990	56 kg

TrioSafe 1100 / 1500

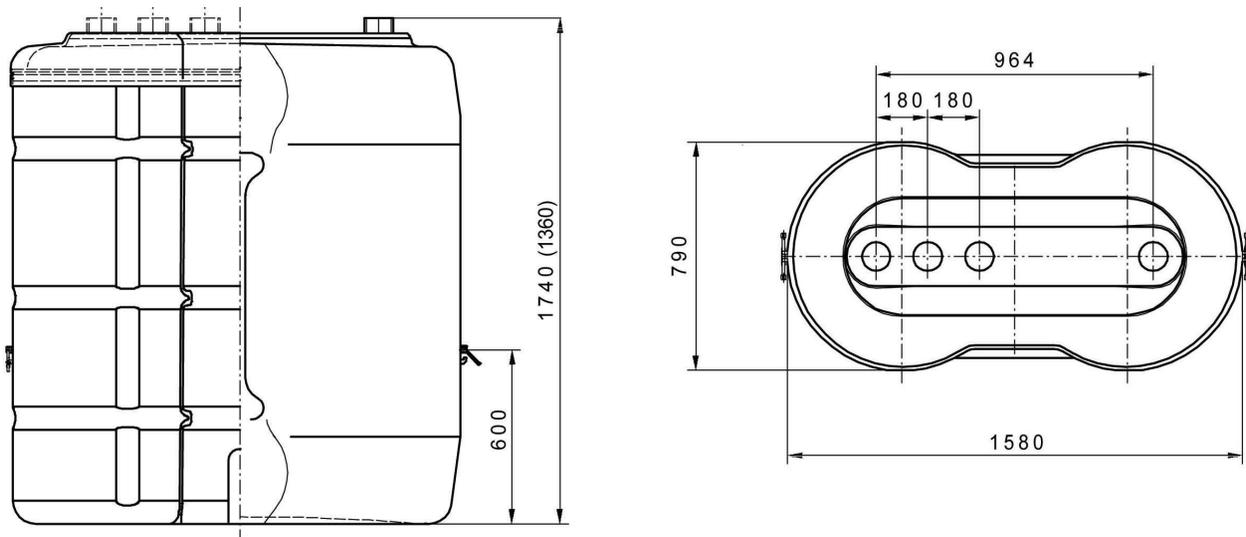

Item no.	Typ / content	Dimensions mm (LxBxH)	Weight
961541	TrioSafe 1100 VS	1.580 x 790 x 1.360	62 kg
961543	TrioSafe 1100 VS (Grey)		
961523	TrioSafe 1500 VS	1.580 x 790 x 1.740	76 kg
961521	TrioSafe 1500 VS (Grey)		

For more information please visit
www.dehoust.com
and enter the item number.

The details in this printed matter are subject to change. Technical details may be changed without notice. In some cases enquiries must be made regarding the suitability of the tanks. The national standards and set up requirements should be observed.